





SO Flow-S
















 \mathbf{W} Intuitive and easy to use

₩ Also compatible in salt water

Self-priming





- igwedge Silence control: low vibration and very quiet
- ightharpoonup Robust and reliable due to the quality of the materials used
- **** Low maintenance due to a large pre-filter basket










SPECIFICATIONS

PRODUCT	SFS 0.5	SFS 0.75	SFS 1	SFS 1.5
Rotation speed	2850 T/mn			
Useful power	0.5 CV 370 W	0.75 CV 550 W	1 CV 750 W	1.5 CV 1100 W
Rated current	3 A	4 A	4.85 A	7.85 A
Consumption	680 W	950 W	1115 W	1800 W
Fitting diameter	ø50 mm	ø50 mm	ø50 mm	ø50 mm
Type of motor	Asynchronous two poles			
Body	Polypropylene and glass fibre			
Bearing	Graphite and ceramic bearing			
Motor shaft	STAINLESS STEEL AISI 420			
Motor body	Aluminium L-2521			
Drain plug	Yes			
Closure of the lid	quarter-turn closure			
Flow at 8 mce	12.5 m³/h	15 m³/h	17 m³/h	19 m³/h
Acoustic power at 1 m	65 dB	67 dB	68 dB	70 dB
Power	220-240V/50Hz			
Unit size (I/L/h)	550x238x330 mm	550x238x330 mm	550x238x330 mm	570x238x330 mm
Box size (I/L/h)	560x265x360 mm	560x265x360 mm	560x270x370 mm	580x270x370 mm
Net weight	8.7 kg	9.3 kg	10.5 kg	13.7 kg
Total weight	10.2 kg	10.8 kg	12 kg	14.7 kg
Warranty	3 years	3 years	3 years	3 years

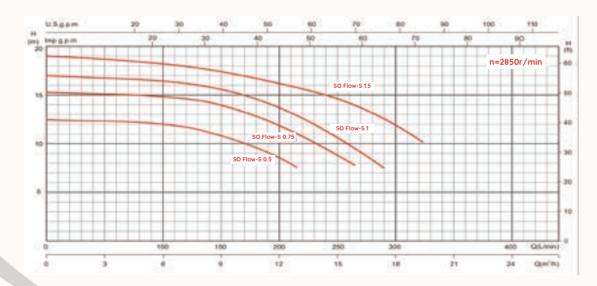

ACCESSORIES

- Pre-filter basket (Volume: 1.9 Litres)
- Silent blocks
- Comes with its connecting cable