



















pump

CONNECTED VARIABLE-SPEED FILTER PUMP





- **₩** Variable-speed filter pump
- Optimisation of filtration efficiency
- ₩ Intuitive and easy to use
- Also compatible in salt water
- 🕔 Silence control: low vibration and very quiet
- Low maintenance due to a large pre-filter basket

- **₩** Built-in automatic diagnostic function
- Automatic pump with storage of the last operating modes
- ightharpoonup Controller with an LCD screen and a keyboard
- ₩ WiFi control
- Robust and reliable due to the quality of the materials used










SPECIFICATIONS

PRODUCT	SPC 1.5
Pre-defined speeds	Low 1,725 rpm Average 2,760 rpm High 3,450 rpm
Rotation speed	750 - 3450/25 rpm
Useful power	1.5 CV 1100 W
Rated current	0.65 - 7.39 A
Consumption	Low 150-300 W Medium 500-900 W High 800-1,700 W
Fitting diameter	ø50 mm (ø48 mm)
Type of motor	Permanent magnet synchronous motor
Body	Polypropylene and glass fibre
Bearing	EagleBurgman BT trim
Motor shaft	STAINLESS STEEL AISI 420
Motor body	ADC12 Aluminium
Drain plug	Yes
Closure of the lid	Quarter-turn closure
Flow at 8 mce	22 m³/h
Acoustic power at 1 m	45 ~ 65 dB
Power	220-240V/50-60Hz
Unit size (I/L/h)	635x256x190 mm
Box size (I/L/h)	660x280x340 mm
Net weight	13.5 kg
Total weight	14.5 kg
Warranty	3 years

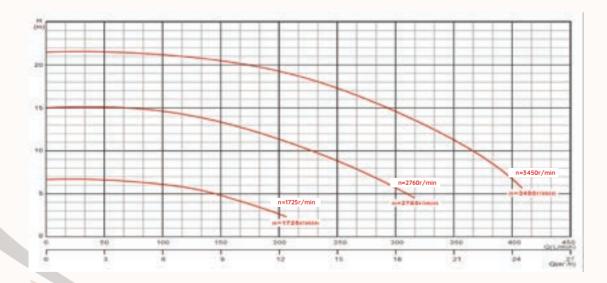

ACCESSORIES

- Pre-filter basket (volume: 2.2 litres)
- Silent block
- Comes with its connecting cable